

Data Sheet Model No.: GP392

Description : Silver Oxide High Drain Button Cell

Nominal Voltage : 1.55 Volts

Nominal Dimensions: Ø7.90 X 3.60mm

Applications : Watch (with alarm and lamp),

calculator, hearing aid,

melody card etc.

Average Weight : 0.7g

Shelf Life : Not less than 90% of the


service capacity, following 1st year storage at 20°C.

Date Code : Unless otherwise specified,

each cell will carry a numeric year code and an alphabetical


month code.

Nominal Service Life : 550 hrs (at  $20k\Omega$  Load) (to 1.2V at  $20^{\circ}$ C) 115 days (at  $100k\Omega$  Load)

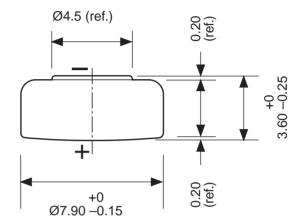

Unit: mm

## Typical Discharge Characteristics at 20°C

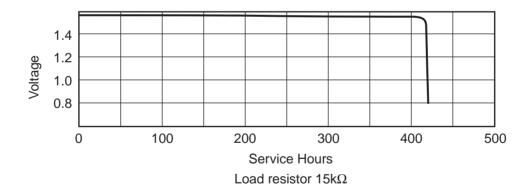

Average Service Capacity: 42 mAh (rated capacity at  $15k\Omega$  load, cut off voltage 1.2V at  $20^{\circ}$ C)

Close circuit voltage:

1.30 Volts (min.) (load resistor  $100\Omega$  at

20°C for 1 to 2 seconds)

## **Cross Reference:**

IEC	JIS	EVEREADY	VARTA	DURACELL	PANASONIC	SONY
SR41	SR41	392	V392	D392	SP392	SR41SW