


Product data sheet



SL20XP2400LED

Type	: Rechargeable NiCd battery 6.0V 2.4Ah	
Nominal dimensions (with sleeve)	: $\varnothing = 23,2$ mm H = 212.0 mm	
Applications	: Streamlight SL20XPLED	
Nominal voltage	: 6.0V	
Nominal capacity	: min : 2350 mAh typical : 2400 mAh (to 5V at 20°C)	
Standard charging	: min 16h (advisable 18h) at 20°C	
Service life	: >500 cycles (IEC 61951-1) up to 1000 cycles (not less than 60% nominal capacity at 0.1C charging / 0.2C discharging)	
Run time in SL20XPLED flashlight	: min : 1h30min typical : 1h45min	
Weight	: 258g	
Temperature range	: Standard charging 0 to 45°C Discharging -20 to 60°C Storage -20 to 25°C Storage -20 to 60°C (1 week)	

Nominal capacity (for 0,2C load)

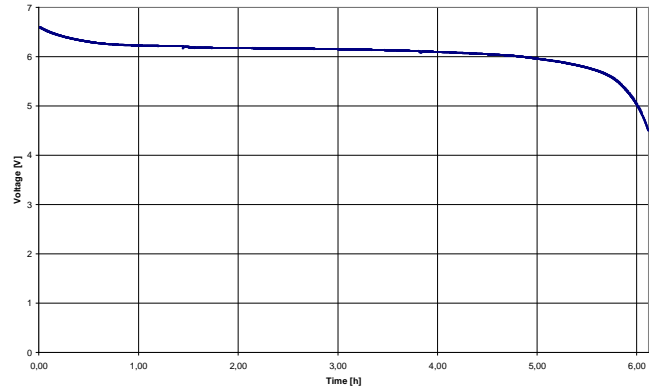

Run time for SL20XPLED 2,4Ah rechargeable battery

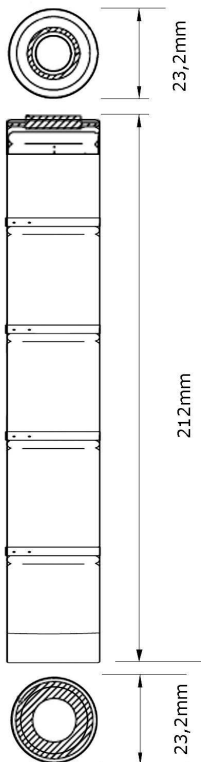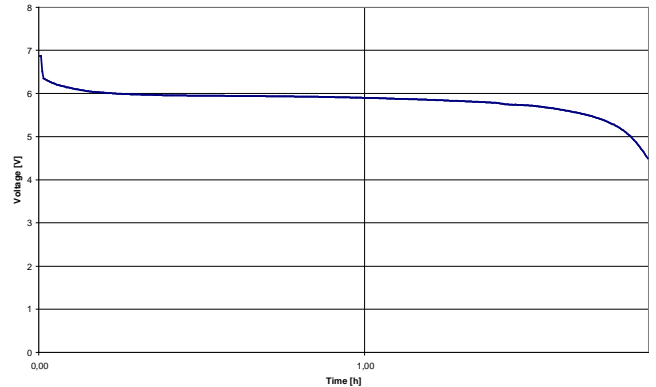

MUST BE RECYCLED OR DISPOSED OF PROPERLY.



now a days any spent battery should not be bin improperly !
Please return old batteries to your supplier.

Info: odpady@bto.pl