
## **MN1604**


 $- \gamma \gamma$ 

tery

| <b>SIZE:</b> 9V (6LF22)         |
|---------------------------------|
| Alkaline-Manganese Dioxide Batt |

| DU                          | 17.5 mm<br>15.5 mm<br>12.95 mm |                                    |
|-----------------------------|--------------------------------|------------------------------------|
| Nominal voltage             | 9V                             | 26.5 mm                            |
| Impedance                   | 3,050 m-ohm@1kHz               |                                    |
| Typical weight              | 45 g (1.6oz)                   | 46.4 mm                            |
| Volume                      | 22.8 cm (1.4 in)               | MAX                                |
| Terminals                   | Miniature snap                 | 48,5 mm<br>46.5                    |
| Storage temperature range   | 5°C to 30°C (41°F to 86°F)     |                                    |
| Operating temperature range | -20°C to 54°C (-4°F to 130°F)  |                                    |
| Designation                 | ANSI: 1604A IEC: 6LF22         | Dimensions shown are IEC standards |

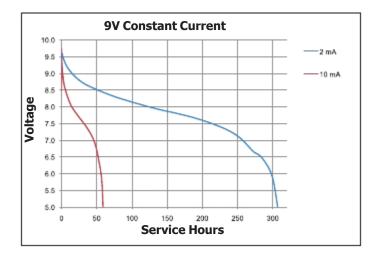

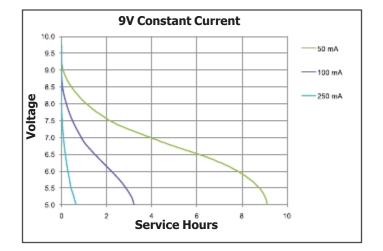



Berkshire Corporate Park Bethel, CT. 06801 U.S.A. Telephone: Toll-free 1-800-544-5454 www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


MN9VCTMA0414




## MN1604


**Size:** 9V (6LF22)

Alkaline-Manganese Dioxide Battery

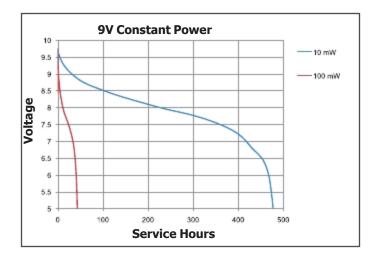


DURACELL

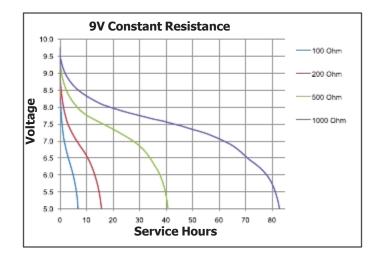

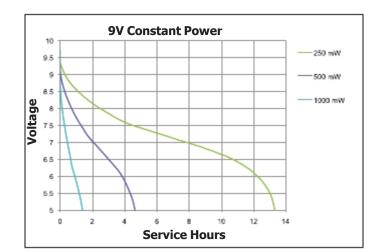

Zn/MnO<sub>2</sub>

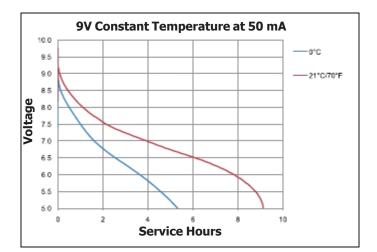



Berkshire Corporate Park Bethel, CT. 06801 U.S.A. Telephone: Toll-free 1-800-544-5454 www.duracell.com Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

MN9VCTMA0414