


NO.	ITEM	Specifications	
3-1	Nominal Capacity:	15000mAh	
3-2	Rated voltage	3.2V	
3-3	Energy density (Wh/kg)	100	
3-4	Internal Resistance	$\leq 6m\ \Omega$	
3-5	Charge (CC-CV)	Charged with constant current to 3.65v and then charged with constant voltage to 0.1-0.2A	
3-6	Charge (float)	$\leq 3.6V$	
3-7	Max. charging current	2C (30A)	
3-8	Max. charging voltage	$3.65 \pm 0.05V$	
3-9	Standard charging current	0.5C, 5A \times 2hours	
3-10	Max. continuous discharging current	3C (45A)	
3-9	Max.pulse discharging current	10C (150A)	
	Standard discharging current	1C(15A)	
3-10	Terminal discharged voltage	2.5-2.0V	
	Self discharge rate (monthly)	5%	
3-11	Dimensions	Diameter	$40 \pm 1mm$
		Height	$165.5 \pm 0.5mm$
3-12	Weight	Approx.480g	
3-13	Working temperature	Charging	0~45°C
		Discharging	-20~65°C
3-14	Storage temperature	In one month	-20~45°C
		In six months	-20~35°C

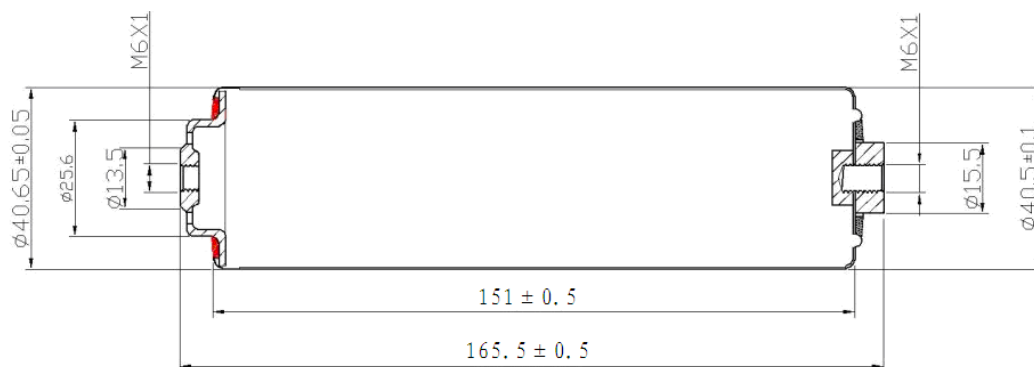

40152E

Producent zastrzega sobie prawo do dokonywania zmian w specyfikacji niniejszego produktu.