

**AA size**

**eneloop**  
Ready to use Rechargeable Battery TM



### Specifications

Model		BK-3MCDE
Type		AA size consumer type
Country origin		Japan
Capacity (minimum) <sup>1)</sup>		2000 mAh
Nominal Voltage		1.2V
Charging Current		Fast Charge <sup>2)</sup> Max. 2000 mA
Ambient Temp.	Charge	0°C - 40°C
	Discharge	-20°C - 50°C
	Storage	Less than 90 days
Less than 1 year		-20°C - 30°C
Internal impedance (after discharge to E.V.=1.0V) <sup>3)</sup>		Approx. 25mΩ (at 1000Hz)


1) Single cell capacity under the following condition.

Charge : 200mA×16h, Discharge : 400mA(E.V.=1.0V) at 25°C

2) Use recommended charging system. 3) After a few charge and discharge cycles under the above 1) condition.


### Cell size, weight with tube

Dimensions	D	14.35mm
	H	50.4mm
Weight	Approx. 28g	

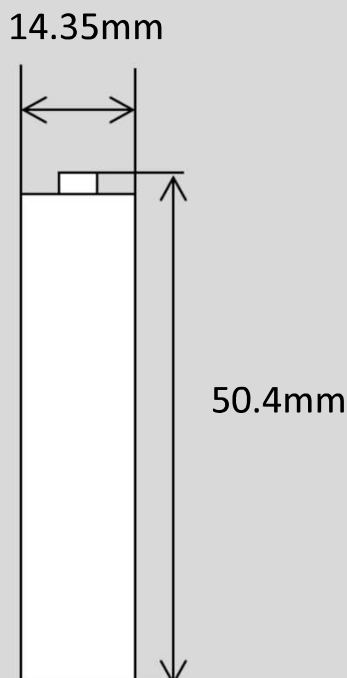

### Typical Characteristics

#### Charge

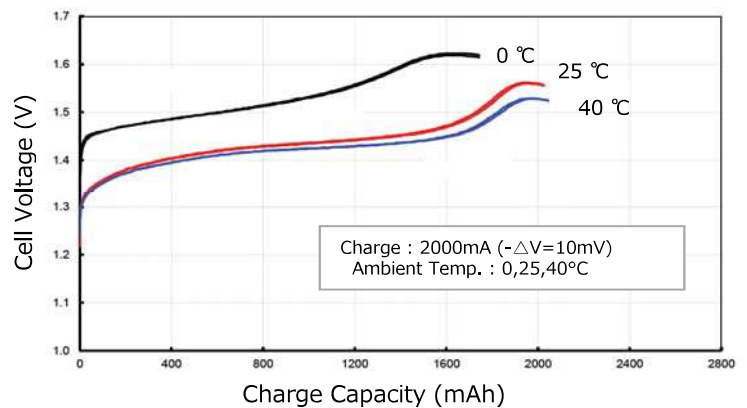

#### Discharge

