


- **TOP PERFORMANCE**
- **TOP QUALITY**
- **TRIED AND TRUSTED IN THE FIELD**



Type Designation	4703
Designation IEC	LR03
System	Zn-MnO ₂ (Alkaline)
Shelf Life (Coding)*	10 years
Nominal Voltage [V]	1.5
Typical Capacity C [mAh]	1260 (discharge with high-resistance)
Permissible Temperature Range	- 20 °C ... 50 °C
Weight, approx. [g]	11
Volume [ccm]	3.8

Dimensions [mm]	min:	max:
∅	9.5	10.5
A	-	44.5
B	43.3	-
C	4.3	-
E	-	0.5
F	-	3.8
G	0.8	-

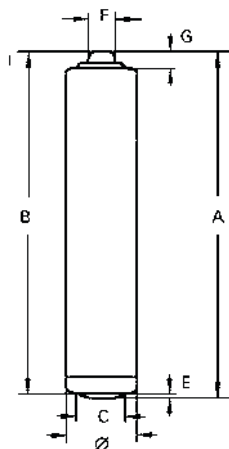

Typical Capacities (at 20°C):			
Discharge Type	Load	End Voltage[V]	0.9
1H/D, 7D/W	100 mA	Time [m]	10,9
Digital audio		Capacity [mAh]	1082
		Energy [mWh]	1310
Discharge Type	Load	End Voltage[V]	0.9
10S/M, 1H/D, 7D/W	600 mA	Pulse [n]	430
Photo Flash		Capacity [mAh]	719
		Energy [mWh]	802
Discharge Type	Load	End Voltage[V]	0.9
4M/H, 8H/D, 7D/W	5.1 Ω	Time [h]	263
Portable Lighting		Capacity [mAh]	1018
		Energy [mWh]	1240

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries

* In consideration of typical loss of capacity at storage and application.