


CH-=Charge-, P-=Discharge- Size:L80*W60*T20mm

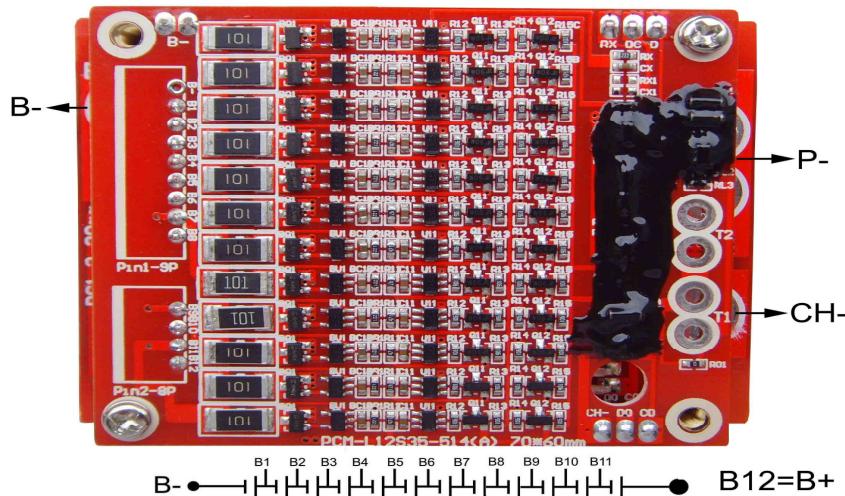

Protection Circuit Module Specifications For 38.4V Lifepo4 Battery Packs

Model: PCM-L12S35-514 (12S)

No.	Test item	Criterion
1	Voltage	Charging voltage
		DC: 43.2V 3.6V/cell Balance voltage for single cell 3.60 ± 0.025 V
2	Current	Balance current for single cell 72 ± 10 mA
		Low Current consumption for single cell ≤ 20 µA
		Maximal continuous charging current 15A
		Maximal continuous Discharging current 30A
3	Over charge Protection	Over charge detection voltage 3.90 ± 0.025 V
		Over charge detection delay time 0.5S—2S
		Over charge release voltage 3.80 ± 0.05 V
4	Over discharge protection	Over discharge detection voltage 2.00 ± 0.05 V
		Over discharge detection delay time 10mS—200mS
		Over discharge release voltage 2.30 ± 0.05 V
5	Over current protection	Over current detection voltage 0.62V
		Over current detection current 120 ± 20 A
		Detection delay time 5ms—20ms
		Release condition Cut load, Auto Recovery
6	Short protection	Detection condition Exterior short circuit
		Detection delay time 200-500us
		Release condition Cut load, Auto Recovery
7	Resistance	Protection circuitry ≤ 30 mΩ
8	Temperature	Operating Temperature Range -40~+85°C
		Storage Temperature Range -40~+125°C