



# UN38.3 TEST REPORT

报告编号

Reference No. .... : WTX20X06038037B001

申请商

Applicant ..... : 深圳领跑能源科技有限公司  
KEEPPOWER TECHNOLOGY CO., LIMITED

申请商地址

Address ..... : 5F, Bldg 4, Fenmenao Industrial Park, Bantian, Long Gang, Shenzhen  
518129, China

制造商

Manufacturer ..... : 深圳领跑能源科技有限公司  
KEEPPOWER TECHNOLOGY CO., LIMITED

制造商地址

Address ..... : 5F, Bldg 4, Fenmenao Industrial Park, Bantian, Long Gang, Shenzhen  
518129, China

产品名称

Name of product ..... : MICRO USB 可充电锂离子电池  
MICRO USB Rechargeable Li-ion Battery

产品型号

Model ..... : P1832U

总共页数

Total pages ..... : 16 pages

依据标准

Standards ..... : 关于危险品货物运输的建议书 试验和标准手册 第六修订版修正 1 第  
38.3 节 (ST/SG/AC.10/11/Rev.6/Amend.1 Section 38.3)  
Section 38.3 of the sixth revised edition amendment 1 of Recommendations  
on the Transport of Dangerous Goods, Manual of Test and Criteria  
(ST/SG/AC.10/11Rev.6/Amend.1 Section 38.3)

发布日期

Date of Issue ..... : 2020-08-03

测试报告表格编号

Test Report Form No. .... : WXB-383-01A

测试结果

Test Result ..... : 所提供的样品符合以上测试标准  
The submitted samples comply with the above standards

备注： 报告未经本司的书面批准不得部分复制，检验检测结果仅对测试样品负责。报告经涂改、增  
删、无批准人签字或未加盖本司检验检测专用章无效。报告未加盖资质认定标志章，则仅用于科  
研、教学、内部质量控制等活动，不可用作为向社会出具具有证明作用数据的用途。

Remarks: The results shown in this test report refer only to the sample(s) tested; this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver. If the report is not stamped with the accreditation recognized seal, it will only be used for scientific research, education, and internal quality control activities, and is not used for the purpose of issuing supporting data to the society.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel:+86-755-33663308

Fax:+86-755-33663309

李国斌

测试 Tested by

程涛

编制 Compiled by



批准 Approved by



产品一般信息 General product information:	
产品分类 Classification .....	MICRO USB 可充电锂离子电池 MICRO USB Rechargeable Li-ion Battery
型号 Model .....	P1832U
额定值 Ratings .....	3.6V, 3200mAh, 11.52Wh
商标 Trade mark.....	KEEPPOWER
标准充电电流 Standard charge current .....	630mA
最大充电电压 Max. charge voltage .....	5V
最大充电电流 Max. charge current .....	3000mA
标准放电电流 Standard discharge current .....	3200mA
最大放电电流 Max. discharge current .....	8000mA
放电截止电压 Discharge cut-off voltage .....	2.5V
尺寸 Dimension .....	Φ18.5mm×70.5mm
报告中可能用到的结论标识 Possible test case verdicts:	
测试项目不适用该产品 test case does not apply to the test object .....	不适用 N/A
测试项目符合标准的要求 test object does meet the requirement .....	合格 P(ass)
测试项目不符合标准的要求 test object does not meet the requirement .....	不合格 F(ail)
测试 Testing:	
样品接受日期 Date of receipt of test item .....	2020-06-17
测试日期 Date(s) of performance of test .....	2020-07-20~2020-07-29
测试结论 Test conclusion:	
由深圳领跑能源科技有限公司送检的 MICRO USB 可充电锂离子电池，根据《关于危险品货物运输的建议书 试验和标准手册》第六修订版修正 1 第 38.3 节进行测试，测试项目见下页表格，测试结果符合标准相关要求	
The MICRO USB Rechargeable Li-ion Battery submitted by KEEPPower TECHNOLOGY CO., LIMITED are tested according to Section 38.3 of the Sixth revised edition Amendment 1 of Recommendations on the Transport of Dangerous Goods, Manual of Test and Criteria (ST/SG/AC.10/11/Rev.6/Amend.1 Section 38.3). Test items see table of next page. The test results comply with the relevant requirement of the standard.	



测试项目 Test item	样品编号 Sample No.	样品状态 Samples' State
T1~T5	B01#~B05#	第 1 个充放电周期, 完全充电状态 At first cycle, in fully charged states
	B06#~B10#	第 25 个充放电周期, 完全充电状态 After 25 cycles ending in fully charged states
T6	C01#-C05#	第 1 个充放电周期 50% 设计额定容量状态 At first cycle at 50% of the design rated capacity
	C06#-C10#	第 25 个充放电周期 50% 设计额定容量状态 After 25 cycle at 50% of the design rated capacity
T7	B11#~B14#	第 1 个充放电周期, 完全充电状态 At first cycle, in fully charged states
	B15#~B18#	第 25 个充放电周期, 完全充电状态 After 25 cycles ending in fully charged states
T8	C11#-C20#	第 1 个充放电周期完全放电状态 At first cycle in fully discharged states
	C21#-C30#	第 25 个充放电周期完全放电状态 After 25 cycles ending in fully discharged states

备注:

本报告中以点号代替小数点

测试环境条件, 环境温度 20°C-25°C, 环境湿度: 45%-75%

分包测试: 不适用

Remarks:

Throughout this report, point is used as the decimal separator

Test environment condition, ambient temperature 20°C-25°C, ambient humidity 45%-75%

Subcontracted test condition: N/A



ST/SG/AC.10/11Rev.6/Amend.1/ Section 38.3											
条款 Clause	测试要求 Requirement-Test	结果评判 Result-Remark	结论 Verdict								
<b>38.3.4</b>	<b>程序 /Procedure</b>		<b>P</b>								
	小型电池或电池组必须按顺序进行试验 T.1 至 T.5。/Test T.1 to T.5 are conducted in sequence on the same cell or battery.		P								
	试验 T.6 和 T.8 应使用未另外试验过的电池或电池组/Test T.6 and T.8 are conducted using not otherwise tested cells or batteries.		P								
	试验 7 使用原先在试验 T.1 至 T.5 中使用过的未损坏电池进行/Test T.7 conducted using undamaged batteries previously used in Tests T.1 to T.5 for purposes of testing on cycled batteries.		N/A								
<b>质量损失 Mass loss</b>	用以下测试步骤 Following procedure is provided:		P								
	质量损失 (%) = (M1-M2) / M1 * 100 此式中 M1 是试验前的质量, M2 是试验后的质量。如果质量损失不超过下表所列的数值, 即为“无质量损失” Mass loss(%)=(M1-M2)/M1*100 Where M1 is the mass before the test and M2 is the mass after the test. When mass loss does not exceed the values in below table, it shall be considered as "no mass loss"		--								
	<table border="1"> <tr> <td>电芯或电池质量 M Mass M of cell or battery</td> <td>质量损失限制 Mass loss limit</td> </tr> <tr> <td>M&lt;1g</td> <td>0.5%</td> </tr> <tr> <td>1g≤M≤75g</td> <td>0.2%</td> </tr> <tr> <td>M≥75g</td> <td>0.1%</td> </tr> </table>	电芯或电池质量 M Mass M of cell or battery	质量损失限制 Mass loss limit	M<1g	0.5%	1g≤M≤75g	0.2%	M≥75g	0.1%		--
电芯或电池质量 M Mass M of cell or battery	质量损失限制 Mass loss limit										
M<1g	0.5%										
1g≤M≤75g	0.2%										
M≥75g	0.1%										
<b>38.3.4.1</b>	<b>试验 T.1: 高度模拟 /Test T.1: Altitude Simulation</b>		<b>P</b>								
38.3.4.1.1	目的/Purpose		P								
	本试验模拟在低压条件下的空运/This test simulates air transport under low-pressure conditions.		--								
38.3.4.1.2	试验程序/Test procedure		P								
	存储气压/Stored at a pressure	11.6 kPa	--								
	环境温度/Ambient temperature (20 ± 5°C)	22.5°C	--								
	存储时间/Stored times( ≥ 6 hours)	6 hours	--								
38.3.4.1.3	要求/Requirement		P								
	无渗漏、无排气、无解体、无破裂和无起火, 并且每个试验电芯或电池在试验后的开路电压不小于其在进行这一试验前电压的 90%, 电压的要求不适用与完全放电状态的试验电池和电池组 / No leakage, no venting, no disassembly, no rupture and no fire and the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.	无渗漏、无排气、无解体、无破裂和无起火, 数据见表 1 / No leakage, no venting, no disassembly, no rupture and no fire. The data see Table 1	P								

**ST/SG/AC.10/11Rev.6/Amend.1/ Section 38.3**

条款 Clause	测试要求 Requirement-Test	结果评判 Result-Remark	结论 Verdict
<b>38.3.4.2</b>	<b>试验 T.2 温度试验/ Test T.2: Thermal Test</b>		<b>P</b>
38.3.4.2.1	目的/Purpose  本试验评估电池和电池组的密封完善性和内部电连接，试验是利用迅速和极端的温度变化进行/This test assesses cell and battery seal integrity and internal electrical connections. The test is conducted using rapid and extreme temperature changes.		--
38.3.4.2.2	试验程序/Test procedure  试验温度和存储时间/ Test temperature and stored hours  两个极端试验温度的最大间隔时间/The maximum time interval	1) $72 \pm 2^\circ\text{C}$ , $\geq 6\text{h}$ 2) $-40 \pm 2^\circ\text{C}$ , $\geq 6\text{h}$	$\leq 30\text{min}$ /Between test temperature extremes is $\leq 30$ minutes.
38.3.4.2.3	测试时间/ Test times  所有电池和电池组在环境温度( $20 \pm 5^\circ\text{C}$ )下存放 24 小时/After which all test cells and batteries are to be stored for 24 hours at ambient temperature ( $20 \pm 5^\circ\text{C}$ ).  对于大型电池和电池组，暴露于极端试验温度的时间至少应为 12 小时/For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours	重复 10 次/Repeated 10 times  环境温度/Ambient temperature $22.9^\circ\text{C}$	-- N/A
38.3.4.3	要求/Requirement  无渗漏、无排气、无解体、无破裂和无起火，并且每个试验电芯或电池在试验后的开路电压不小于其在进行这一试验前电压的 90%，电压的要求不适用与完全放电状态的试验电池和电池组 / No leakage, no venting, no disassembly, no rupture and no fire and the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.	无渗漏、无排气、无解体、无破裂和无起火； 数据见表 1 / No leakage, no venting, no disassembly, no rupture and no fire. The data see Table 1	P
38.3.4.3.1	目的/ Purpose  本试验模拟运输过程中的振动/This test simulates vibration during transport.		P --
38.3.4.3.2	测试程序/ Test procedure  电池和电池组以不使电芯变形且能正确地传播振动的方式紧固在振动机平台上/Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration.		P
	振动应以正弦波形振动，频率在 7Hz 和 200Hz 之间摆动再回到 7Hz 的对数扫频为时 15min / The vibration shall be a sinusoidal waveform with a logarithmic sweep between 7Hz and 200Hz and back to 7Hz traversed in		P



ST/SG/AC.10/11Rev.6/Amend.1/ Section 38.3			
条款 Clause	测试要求 Requirement-Test	结果评判 Result-Remark	结论 Verdict
	15minutes.		
	从 7HZ 开始保持 $1 g_n$ 的最大加速度直到频率达到 18HZ, 然后将振幅保持在 0.8mm(总偏移 1.6mm)并增加频率直到最大加速度达到 $8 g_n$ (频率约为 50HZ)。将最大加速度保持在 $8 g_n$ 直到频率增加到 200HZ /From 7 Hz to a peak acceleration of $1 g_n$ is maintained until 18Hz is reached. The amplitude is then maintained at 0.8mm (1.6mm total excursion) and the frequency increased until a peak acceleration of $8 g_n$ occurs (approximately 50 Hz). A peak acceleration of $8 g_n$ is then maintained until the frequency is increased to 200 Hz		P
	振动须对三个互相垂直的电池安装方位的每一方向都重复进行 12 次, 总共 3 小时。其中一个方向必须与端面垂直/This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face.		P
38.3.4.3.3	要求/ Requirement		P
	试验中和试验后无渗漏、无排气、无解体、无破裂和无起火, 并且每个试验电芯或电池在第三个垂直安装方位上的试验后的立即测得开路电压不小于其在进行这一试验前电压的 90%, 电压的要求不适用与完全放电状态的试验电池和电池组/No leakage, no venting, no disassembly, no rupture and no fire during the test and after the test and the open circuit voltage of each test cell or battery directly after testing in its third perpendicular mounting position is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.	无渗漏、无排气、无解体、无破裂和无起火, 数据见表 1/ No leakage, no venting, no disassembly, no rupture and no fire during the test .The data see Table 1	P
38.3.4.4	试验 4 冲击/ Test T.4: Shock		P
38.3.4.4.1	目的/ Purpose		P
	本试验评估电池和电池组抵抗累计冲击的耐受程度/This test assesses the robustness of cells and batteries against cumulative shocks		--
38.3.4.4.2	测试程序 /Test procedure		P
	试验电池和电池组用坚硬的支架固定在试验装置上, 支架支撑着每个试验电池的所有安装面;/Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery.		P
	电池经受峰值加速度 $150 g_n$ 和脉冲持续时间 6ms 的半正弦波冲击/Each cell shall be subjected to a half-sine shock of peak acceleration of $150 g_n$ and pulse duration of 6milliseconds.		P
	大电池经受峰值加速度 $50 g_n$ 和脉冲持续时间 11ms 的半正弦波冲击/Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of $50 g_n$ and pulse duration of 11 milliseconds.		N/A



## ST/SG/AC.10/11Rev.6/Amend.1/ Section 38.3

条款 Clause	测试要求 Requirement-Test			结果评判 Result-Remark	结论 Verdict
	每个电池需经受半正弦波冲击的峰值加速度取决于电池的质量。小型电池组的脉冲持续时间为 6ms, 大型电池组为 11ms。以下提供的公式用来计算适合的最小峰值加速度/Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 milliseconds for small batteries and 11 milliseconds for large batteries. The formulas below are provide to calculate the appropriate minimum peak accelerations.				N/A
	Battery	Minimum peak acceleration	Pulse duration		
	Small batteries	150 g <sub>n</sub> or result of formula $\text{Acceleration}(g_n) = \sqrt{\frac{100850}{\text{mass}}}$ Whichever is smaller	6ms		N/A
	Large batteries	50 g <sub>n</sub> or result of formula $\text{Acceleration}(g_n) = \sqrt{\frac{30000}{\text{mass}}}$ Whichever is smaller	11ms		
	每个电池和电池组在三个互相垂直的安装方位的正方向经受三次冲击，接着反方向经受三次冲击，总共经受 18 次冲击/Each cell or battery shall be subjected to three shocks in the positive direction and to three shocks in the negative direction in each of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks.				P
38.3.4.4.3	要求/Requirement				P
	无渗漏、无排气、无解体、无破裂和无起火，并且每个试验电芯或电池在试验后的开路电压不小于其在进行这一试验前电压的 90%，电压的要求不适用与完全放电状态的试验电池和电池组/No leakage, no venting, no disassembly, no rupture and no fire and the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.			无渗漏、无排气、无解体、无破裂和无起火，数据见表 1 /No leakage, no venting, no disassembly, no rupture and no fire. The data see Table 1	P
38.3.4.5	试验 5 外部短路 /Test T.5: External Short Circuit				P
38.3.4.5.1	目的/ Purpose				P
	本试验模拟外部短路/This test simulates an external short circuit.				--
38.3.4.5.2	试验程序 /Test procedure				P
	电池和电池组加热一段时间，外壳稳定在温度 57±4°C 下后开始测试。时间根据电池和电池组的尺寸和设计，评估和记录加热时间。如果不可评估此值，小型电池和电池组需至少暴露 6h, 大型电池和电池组需 12h//The cell or battery to be tested shall be heated for a period of time necessary to reach a homogeneous stabilized				P

**ST/SG/AC.10/11Rev.6/Amend.1/ Section 38.3**

条款 Clause	测试要求 Requirement-Test	结果评判 Result-Remark	结论 Verdict
	temperature $57 \pm 4^\circ\text{C}$ , measured on the external case. This period of time depends on the size and design of the cell or battery and should be assessed and documented. If this assessment is not feasible, the exposure time shall be at least 6 hours for small cells and small batteries, and 12 hours for large cells and large batteries.		
	在 $57 \pm 4^\circ\text{C}$ 温度下, 电池和电池组需经受外部电阻 $0.1\text{ohm}$ 的短路试验/Then the cell or battery at $57 \pm 4^\circ\text{C}$ shall be subjected to one short circuit condition with a total external resistance of less than $0.1\text{ ohm}$ .		P
	电池和电池组外部壳体温度恢复到 $57 \pm 4^\circ\text{C}$ 后, 短路需持续至少 1 小时, 或大型电池组壳体温度值下降测试中最高温升值的一半, 并且保持在这个值以下/This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to $57 \pm 4^\circ\text{C}$ , or in the case of the large batteries, has decreased by half of the maximum temperature increase observed during the test and remains below that value.		P
38.3.4.5.3	要求/ Requirement		P
	外壳温度不超过 $170^\circ\text{C}$ , 并且在试验过程中及试验后 6 小时内无解体、无破裂、无起火 Cells and batteries external temperature does not exceed $170^\circ\text{C}$ and there is no disassembly, no rupture and no fire during the test and within six hours after this test.	试验过程中及试验后 6 小时内无解体、无破裂、无起火, 数据见表 2 / No disassembly, no fire during the test and within six hours after this test. The data see Table 2.	P

38.3.4.6	试验 6 撞击/挤压 Test T.6: Impact / Crush		P
38.3.4.6.1	目的 /Purpose		P
	本试验模拟撞击或挤压等可能造成内部短路的机械性破坏 /These tests simulate mechanical abuse from an impact or crush that may result in an internal short circuit.		--
38.3.4.6.2	试验程序-撞击 (适用于直径不小于18毫米的圆柱形电池) /Test procedure – Impact (applicable to cylindrical cells not less than 18.0 mm in diameter)		P
	将式样电池或元件电池放在平坦光滑的表面上。一根 316 型不锈钢棒横放在试样中心, 钢棒直径 $15.8 \text{ mm} \pm 0.1\text{mm}$ , 长度至少 6cm, 或电池最长端的尺度, 取二者之长者。将一块 $9.1 \text{ kg} \pm 0.1\text{kg}$ 的重锤从 $61 \pm 2.5\text{cm}$ 高处跌落到钢棒和试样交叉处, 使用一个几乎没有摩擦的, 对落体重锤阻力最小的垂直轨道或管道加以控制。垂直管道或管道用于引导落锤沿与水平支撑表面呈 $90^\circ$ 落下/The test sample cell or component cell is to be placed on a flat smooth surface. A $15.8 \text{ mm} \pm 0.1\text{mm}$ diameter, at least 6 cm long, or the longest dimension of the cell, whichever is greater, Type 316 stainless steel bar is to be placed across the centre of the sample. A $9.1 \text{ kg} \pm 0.1\text{ kg}$ mass is to be dropped from a height of $61 \pm 2.5$		P



ST/SG/AC.10/11Rev.6/Amend.1/ Section 38.3			
条款 Clause	测试要求 Requirement-Test	结果评判 Result-Remark	结论 Verdict
	cm at the intersection of the bar and sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. The vertical track or channel used to guide the falling mass shall be oriented 90 degrees from the horizontal supporting surface.		
	接受撞击的试样，纵轴应与平坦表面平行并与横放在试样中心的直径 $15.8 \text{ mm} \pm 0.1\text{mm}$ 弯曲表面的纵轴垂直;每一个试样只经受一次撞击/The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the $15.8 \text{ mm} \pm 0.1\text{mm}$ diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact.		P
38.3.4.6.3	试验程序-挤压 (适用于棱柱形、袋装、硬币/纽扣电芯和直径小于18mm的圆柱形电池) /Test Procedure – Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells less than 18.0 mm in diameter)		N/A
	将电池或元件电池放在两个平面之间挤压，挤压力度逐渐加大，在第一个接触点上的速度大约 $1.5\text{cm/s}$ 。挤压持续进行，直到出现三种情况之一：/A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately $1.5 \text{ cm/s}$ at the first point of contact. The crushing is to be continued until the first of the three options below is reached.		N/A
	施加的力量达到 $13 \text{ kN} \pm 0.78\text{kN}$ The applied force reaches $13 \text{ kN} \pm 0.78 \text{ kN}$ ;	<input type="checkbox"/> Reach this condition	N/A
	电池的电压下降至少 $100\text{mV}$ The voltage of the cell drops by at least $100 \text{ mV}$ ;	<input type="checkbox"/> Reach this condition	N/A
	电池变形达原始厚度的 50% 或以上/The cell is deformed by 50% or more of its original thickness.	<input type="checkbox"/> Reach this condition	N/A
	每个测试的电池或元件电池只做一次挤压试验/Each test cell or component cell is to be subjected to one crush only.		N/A
	试验样品需观察 6 小时/The test samples shall be observed for a further 6h		N/A
	试验应使用之前未做过其他试验的电池或元件电池进行/The test shall be conducted using test cells or component cells that have not previously been subjected to other tests.		N/A
38.3.4.6.4	要求/ Requirement		P
	外壳温度不超过 $170^\circ\text{C}$ ，并且在试验过程中及试验后 6 小时内无解体、无破裂、无起火/Cells and component cells meet this requirement if their external temperature does not exceed $170^\circ\text{C}$ and there is no disassembly and no fire during the test and within six hours after this test.	在试验过程中及试验后 6 小时内无解体、无破裂、无起火;数据见表 3 /No disassembly and no fire during the test and within six hours after this test. The data see Table 3	P

**ST/SG/AC.10/11Rev.6/Amend.1/ Section 38.3**

条款 Clause	测试要求 Requirement-Test	结果评判 Result-Remark	结论 Verdict
<b>38.3.4.7</b>	<b>试验 7 过度充电 /Test T.7: Overcharge</b>		<b>P</b>
38.3.4.7.1	目的 /Purpose		<b>P</b>
	本试验评估可充电池承受过度充电状况的能力/This test evaluates the ability of a rechargeable battery to withstand an overcharge condition.		--
38.3.4.7.2	试验程序/Test procedure		<b>P</b>
	充电电流是制造商建议的最大持续充电电流的两倍 The charge current shall be twice the manufacturer's recommended maximum continuous charge current.	3000mA×2=6000mA	<b>P</b>
	试验的最小电压如下: /The minimum voltage of the test shall be as follows: a)制造商建议的充电电压不大于 18V 时, 试验的最小电压是电池组最大充电电压的两倍或 22V 两者中的较小者 /When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.	5V×2=10V	<b>P</b>
	b) 制造商建议的充电电压大于 18V 时, 试验的最小电压应为最大充电电压的 1.2 倍/When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.		N/A
	试验环境温度/ Ambient temperature.	23.2 °C	--
	试验的进行时间/ The duration of the test.	24h	--
38.3.4.7.3	要求 /Requirement		<b>P</b>
	充电电池在试验过程中和试验后 7 天内无解体, 无起火/Rechargeable battery is no disassembly and no fire during the test and within seven days after the test.	试验过程中和试验后 7 天内无解体, 无起火;数据见表 4/ No disassembly and no fire during the test within seven days after the test. The data see Table 4	<b>P</b>
<b>38.3.4.8</b>	<b>试验 8 强制放电 / Test 8: Forced discharge</b>		<b>P</b>
38.3.4.8.1	目的 Purpose		<b>P</b>
	本试验评估原电池或充电电池承受强制放电状况的能力 / This test evaluates the ability of a primary or a rechargeable cell to withstand a forced discharge condition.		--
38.3.4.8.2	试验程序/Test procedure		<b>P</b>
	每个电池应在环境温度下与 12V 直流电电源串联在起始电流等于制造商给定的最大放电电流的条件强制放电/ Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12 V DC power supply at an initial current equal to the maximum discharge current specified by the manufacturer.		<b>P</b>
	将适当大小和额定值的电阻负荷与试验电池串联, 计算得给定的放电电流。对每个电池进行强制放电, 放电时		<b>P</b>


**ST/SG/AC.10/11Rev.6/Amend.1/ Section 38.3**

条款 Clause	测试要求 Requirement-Test	结果评判 Result-Remark	结论 Verdict
	间 (小时) 应等于其额定容量迟疑初始试验电流 (安培) / The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere).		
38.3.4.8.3	要求/Requirement		P
	原电池或充电电池如在试验过程中和试验后 7 天内无解体，无起火/ Primary or rechargeable cells meet this requirement if there is no disassembly and no fire during the test within seven days after the test.	试验过程中和试验后 7 天内无解体，无起火。数据见表 5 / No disassembly and no fire during the test within seven days after the test. The data see Table 5	P

**Test data:****Table 1 T.1~T.4**

No.	Test before		T.1: Altitude Simulation				T.2: Thermal Test				T.3: Vibration				T.4: Shock				Result
	Mass (g)	OCV (V)	Mass (g)	OCV (V)	Mass loss (%)	Residual OCV (%)	Mass (g)	OCV (V)	Mass loss (%)	Residual OCV (%)	Mass (g)	OCV (V)	Mass loss (%)	Residual OCV (%)	Mass (g)	OCV (V)	Mass loss (%)	Residual OCV (%)	
B01#	49.631	4.200	49.631	4.200	0.000	100.00	49.624	4.114	0.014	97.95	49.624	4.113	0.000	99.98	49.624	4.113	0.000	100.00	P
B02#	49.852	4.200	49.851	4.187	0.002	99.69	49.848	4.112	0.006	98.21	49.847	4.112	0.002	100.00	49.846	4.110	0.002	99.95	P
B03#	49.568	4.195	49.568	4.189	0.000	99.86	49.566	4.107	0.004	98.04	49.566	4.105	0.000	99.95	49.564	4.105	0.004	100.00	P
B04#	49.578	4.200	49.578	4.200	0.000	100.00	49.571	4.115	0.014	97.98	49.570	4.115	0.002	100.00	49.569	4.115	0.002	100.00	P
B05#	49.525	4.199	49.525	4.193	0.000	99.86	49.522	4.107	0.006	97.95	49.520	4.105	0.004	99.95	49.519	4.104	0.002	99.98	P
B06#	49.536	4.200	49.536	4.200	0.000	100.00	49.531	4.115	0.010	97.98	49.530	4.115	0.002	100.00	49.530	4.115	0.000	100.00	P
B07#	49.580	4.192	49.580	4.188	0.000	99.90	49.573	4.107	0.014	98.07	49.573	4.106	0.000	99.98	49.572	4.105	0.002	99.98	P
B08#	49.819	4.200	49.818	4.198	0.002	99.95	49.813	4.111	0.010	97.93	49.812	4.109	0.002	99.95	49.811	4.109	0.002	100.00	P
B09#	49.812	4.200	49.812	4.200	0.000	100.00	49.810	4.114	0.004	97.95	49.810	4.113	0.000	99.98	49.808	4.111	0.004	99.95	P
B10#	49.884	4.200	49.881	4.200	0.006	100.00	49.878	4.117	0.006	98.02	49.878	4.117	0.000	100.00	49.877	4.116	0.002	99.98	P

**Table 2 T.5 External short circuit**

No.	OCV (V)	Max. Temp (°C)	Result
B01#	4.113	55.2	P
B02#	4.110	55.3	P
B03#	4.105	55.2	P
B04#	4.115	55.1	P
B05#	4.104	55.4	P
B06#	4.115	55.2	P
B07#	4.105	55.3	P
B08#	4.109	55.1	P
B09#	4.111	55.4	P
B10#	4.116	55.1	P

**Table 3 T.6 Impact / Crush**

No.	OCV (V)	Max. Temp(°C)	Result
C01#	3.679	121.1	P
C02#	3.677	121.7	P
C03#	3.677	93.7	P
C04#	3.679	125.7	P
C05#	3.676	121.6	P
C06#	3.678	129.4	P
C07#	3.678	130.3	P
C08#	3.677	123.3	P
C09#	3.676	130.4	P
C10#	3.674	125.0	P

**Table 4 T.7 Overcharge**

No.	Max. Temp (°C)	Result	No.	Max. Temp (°C)	Result
B11#	23.4	P	B15#	23.4	P
B12#	23.3	P	B16#	23.5	P
B13#	23.3	P	B17#	23.3	P
B14#	23.4	P	B18#	23.3	P

**Table 5 T.8 Forced discharge**

No.	OCV (V)	Result	No.	OCV (V)	Result
C11#	2.980	P	C21#	2.945	P
C12#	2.925	P	C22#	2.982	P
C13#	2.997	P	C23#	2.956	P
C14#	2.923	P	C24#	2.958	P
C15#	2.981	P	C25#	2.946	P
C16#	2.959	P	C26#	2.921	P
C17#	3.005	P	C27#	2.935	P
C18#	2.943	P	C28#	2.996	P
C19#	2.978	P	C29#	2.927	P
C20#	2.982	P	C30#	2.925	P



## Photos



Photo 1



Photo 2

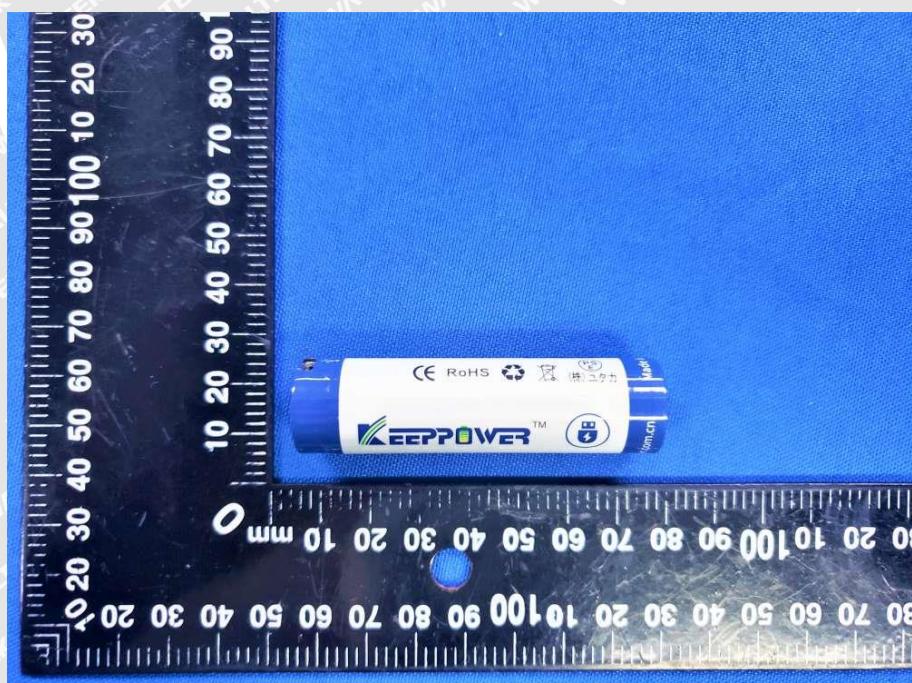


Photo 3

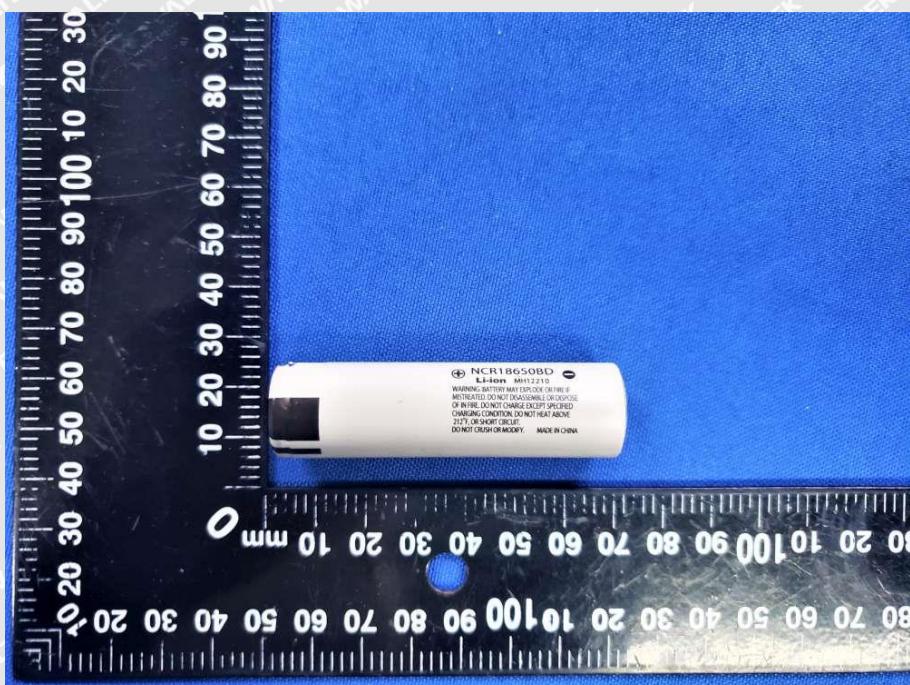


Photo 4

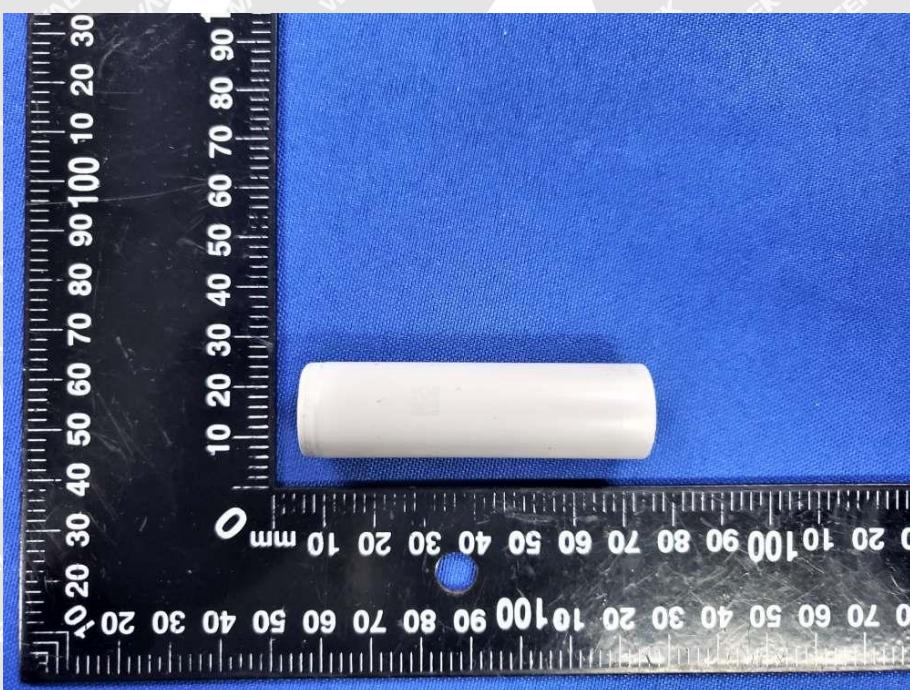


Photo 5

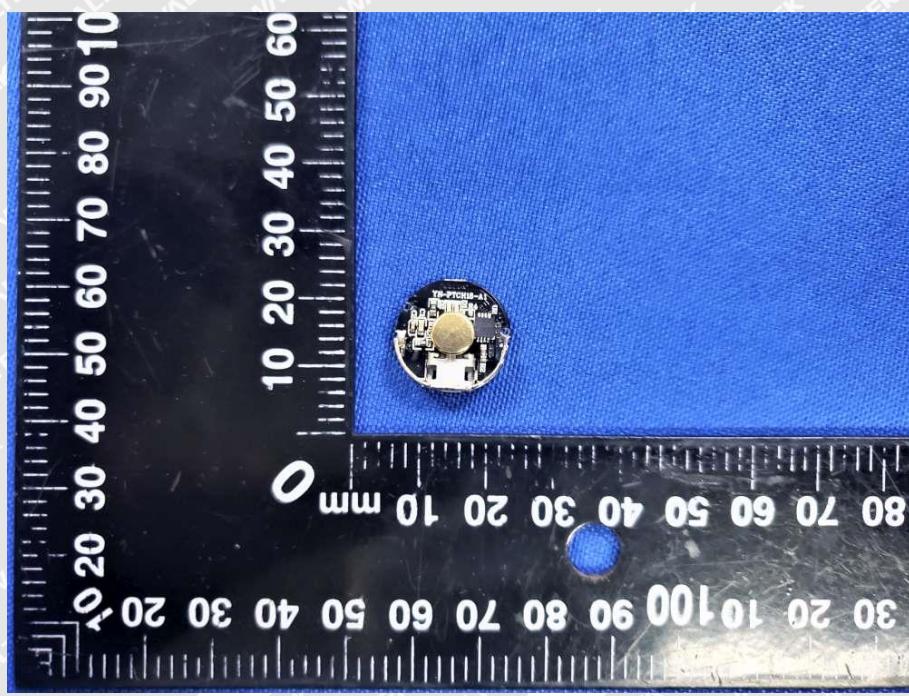


Photo 6



Photo 7

===== End of Report =====