XTAR®

EU4S

DC-DC USB CHARGER



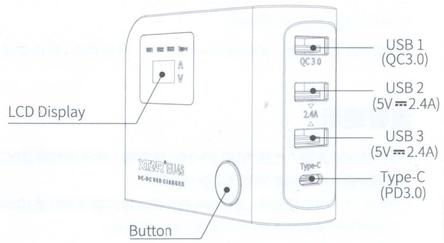

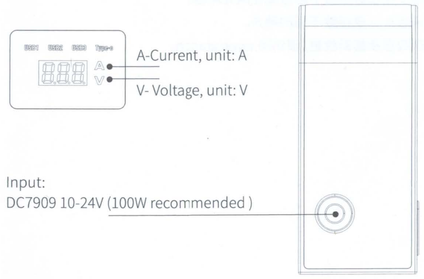

Introduction

Ideas come from solar panel, but not limited to solar panel

This innovative DC-DC USB charger features MPPT algorithm using the DC7909 input port commonly used for high-power portable solar panels. EU4S aims to expand the range of applications for your high-power solar panels. with its 4 output ports (1x Type-C PD3.0, 1x USB QC3.0, 2 x 5V 2.4A), which supports PD 45W fast charge, can be used for various electronic devices charging, such as mobile phones, drones, tablets, laptops, digital cameras etc. EU4S comes with a DC 7909 car adapter, which offers simplicity in use with car cigarette lighter, it can also connect to other power supply devices feature a car adapter port, such as outdoor power stations.

Specifications

Model		EU4S
Input		DC7909 10-24V (100W recommended)
Output	Type-C	PD3.0 5V ⎓ 3A / 9V ⎓ 3A / 12V ⎓ 3A / 15V ⎓ 3A
	USB1 (QC3.0)	QC3.0 5V ⎓ 3A / 9V ⎓ 2A / 12V ⎓ 1.5A
	USB2	5V⎓2.4A
	USB3	5V⎓2.4A
Size		92mm x 66mm x 28.8mm
Weight		95g
Package Content		Charger, car adapter, Manual

Operation

1. The step for Input:
   Connect to DC7909 port of solar panel , or via your car adapter connects t other power supply devices feature a car adapter DC7909 port, such as outdoor power stations;
2. The step for output:
   Connect to portable devices that require power supply;
3. Click button repeatedly to switch among Type-C/ USB1/ USB2/ USB3/ Type-C in a cycle, the screen displays output voltage and current value of the chosen channel;
4. Long press the button for 3 seconds to turn off the back light, short press to lighten the screen;
5. Please pack up the product after usage.

Warranty

Please take the product (with warranty number) and receipt to local dealer to get after-sales service.

- 15 days free replacement.
- 12 months free repair. If problems develop beyond 12 months, we will offer free repair service but charge for parts used. The dealer will inform you the repair fee before repair.
- Lifetime technical support.

Note:
1. Artificial damage are not included in the warranty.
2. Warranty number (9-13 digits) can be found on the package or produ

Global After-sales Email: service@xtar.cc